

VERSA® SIDE-MOUNTED UNITS
All Heads are Interchangeable

VERSA MOWER

- Cutting Width: 60" or 72"
- Blade Carrier: 1-1/4" x 6"
- Blade: 1/2" x 4" updraft
- Hyd. Motor Rating: Gear Type 51 GPM @ 2400 RPM
- Deck Thickness: 10-gauge
- Deck Frame: 4" x 9" channel
- Skid Shoes: Full-length, replaceable
- Debris Deflector: Chainguards front and rear

OPTIONS

- Pan Blade Holder: 2, 3, or 6 blades
- Tail Wheel Assembly
- Breakaway (60" only)
- Front chainguards and rear flaps

VERSA FLAIL

- Cutting Width: 60" or 74"
- Cuttershaft: 4-1/2" tube balanced greasable bearings
- Knives: 60"- 36 pr. 3 oz.; 74" - 36 pair, 3 oz.
- Hyd. Motor Rating: Gear type, 50 HP @ 2500 PSI
- Deck Thickness: 10-gauge deck
- End Plates: 1/2" inside and 5/16" outside
- Deck Frame: 2-7/8" tube, full-length
- Skid Shoes: Full-length, replaceable
- Rear Roller: Adj. 6" dia., full-width, greasable bearings
- Debris Deflector: Full-width rubber & fabric rear

THE VERSA® BOOM UNIT IS AVAILABLE IN 17', 20', & 23' REACHES.
All Mowing and Cutting Heads are Interchangeable

FLAIL-AXE®

- Width of Cut: 48"
- Cutter Shaft: 4-1/2" dia. steel tube, 3/8" wall, greasable bearings
- Knives: 16 ea., 2 lb., 360° swing, reversible
- Hyd. Motor Rating: Gear Type, 76 HP @ 3000 PSI @ 2400 RPM
- Deck Thickness: 10-gauge
- End Plates: 3/8"
- Deck Frame: 4" square cross-tube
- Skid Shoes: Full-length, replaceable
- Rear Roller: 5-1/2" dia. tube, adj. 3/4" to 6"
- Debris Deflector: Full-width rubber-covered fabric, rear. Removable full-width steel, front.

HEAVY DUTY GRASS FLAIL

- Width of Cut: 60"
- Cuttershaft: 4-1/2" balanced tube, greasable bearings
- Knives: 36 pair of 3oz. knives are standard
- Hyd. Motor Rating: Gear Type 76 HP @ 3000 PSI @ 2400 RPM
- Deck Thickness: 10-gauge
- End Plates: 1/4" thick
- Deck Frame: 2-7/8" tube, full-width front & rear
- Skid Shoes: Full-length, replaceable
- Rear Roller: 6" tube, greasable bearings
- Debris Deflector: Full-width, rubber-covered fabric, rear

TIMBER CAT® SICKLE BAR

- Cuts up to 4" tree limbs
- Width of Cut: 5' or 7'
- Blade Bar: 5/8" thick
- Blade: T-1 steel
- Direct coupled operating hydraulic cylinder (excludes pitman)

BUZZBAR® TREE LIMB CUTTER

- Cutting Width: 7-1/2"
- Blades: 2, 3, or 4 blades, each 26" in diameter and 3/16" thick
- Cuts up to 6" diameter tree limbs
- Hydraulic Motor: 38 HP
- Main Channel: Formed of 3/16" sheet steel
- End Plates: 3/8"
- Roller Bearings: Tapered with factory set pre-load
- Rear Shield: 10-gauge steel formed for stiffness

BOOM-AXE®

- Widths of Cut: 60" std., 50" opt.
- Blade Bar: 60"- 3 leaf 5"x 7/8" 50"- 3/4" x 29" disc. (up to 6 blades.)
- Blades: 60"- 5"x 14"x 5/8" replaceable
- Hyd. Motor Rating: Gear Type 101 HP @ 2750 PSI @ 2400 RPM
- Deck Thickness: 10-gauge
- Side Skirts: 3/8"
- Frame: Cross-braced, 3/8" bar
- Skid Shoes: Replaceable, full-length
- Debris Deflector: Front, spring-loaded, retractable shield. Rear, 3-ply rubber belting.

OPTION

- 50" cutting head, two-leaf blade bar with two blades

ROTARY GRASS MOWER

- Width of Cut: 60'
- Blade Bar: Single leaf, 5"x 7/8"
- Blade: 14"x 3"x 1/2", free-swinging
- Hyd. Motor Rating: Gear type, 74 HP @ 2500 PSI
- Deck Thickness: 14-gauge
- Side Skirts: 1/4" thick
- Frame: 3/8" bar, cross-braced
- Skid Shoes: Full-length, replaceable
- Debris Deflector: 3-ply rubber belting, front & rear

Warranty: One year limited parts and labor. Non-governmental users are subject to modified policy. Only genuine Alamo Industrial parts should be used for warranty replacement.

UNMATCHED VERSATILITY

There are times when you need a rotary mower. At other times, a flail mower or a brush cutter may be more suitable. Switching mowing heads is very easy using the **VERSA® Series**. Within minutes you can remove and replace the type of cutting head to fit your application. Think of the following savings of needing only one tractor for all of your mowing challenges.



1502 East Walnut St. • Seguin, Texas 78155
1-800-882-5762
www.alamo-industrial.com



VERSA® Series

BUILT SHARPER™

This information is intended to be of a general nature only; specifications are subject to change without notice as we continue to improve our products.

© 2004 Alamo Group Inc. Alamo Industrial and VERSA are registered trademarks of Alamo Group Inc. MEMBER OF THE ALAMO GROUP ALWAYS ON THE CUTTING EDGE.


The VERSA® Series is designed to be used with tractors in the 5,000-pound class. Mount kits are available for some tractor models with cabs and/or four-wheel drive. VERSA Series units are available as side-mounted or boom-mounted vegetation management tools. The side-mount cutting head options include rotary and flail mowers. The boom-mounted cutting heads include rotaries, flails and brush cutters. A hydraulic, two section gear-type pump delivers the power for the VERSA series. The pump has an automatic pressure relief in both circuits. One section of the pump provides power to the movement controls. The hydraulic pump is rated at 51 GPM and 2400 RPM. The VERSA Series has its own hydraulic system and does not connect to the tractor's hydraulic system.



Nothing compares to the versatility of the VERSA® Mowing System.

BuzzBar® Tree Limb Cutter

Available in 2, 3 or 4 blade versions, the saw blades of the BuzzBar will quickly cut up to 6" tree limbs and will leave a smooth, clean cut. The hydraulically-powered cutter mounts to any Alamo Industrial boom. The smooth cut will make you proud of a job well done.

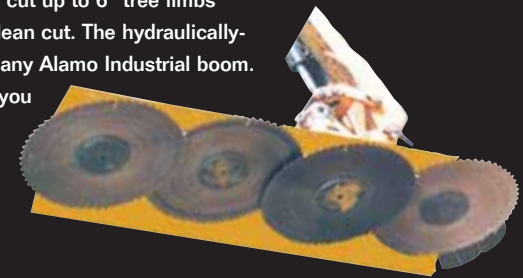

Timber Cat® Sickle Bar Limb Cutter

This boom-mounted sickle bar will cut up to a 4" diameter limb and leave a smooth cut. You don't have to worry about the cut limbs being thrown. When the limbs are cut they fall straight to the ground. Available in 5' or 7' cutting widths.

Rotaries, Flails and Attachments for cutting grass, brush and tree limbs.

Rotary Grass Mower

This boom-mounted rotary grass mower has a cutting width of 60". By using the boom, you can easily cut grass and weeds where side or rear-mount mowers cannot. The hydraulic motor is gear-type and rated at 74-hp at 2500 psi. The blade bar is single leaf and the blades are free-swinging.



VERSA Side-Mount Rotary

The hydraulic power of the VERSA side-mount rotary mower will allow you to cut a 60" or 72" swath through heavy vegetation. The unit is also quickly interchangeable with several other cutting heads: Flail, sickle bar, rotary saw, ditcher and booms.




FLAIL-AXE® 48

The FLAIL-AXE is a boom-mounted, hydraulically powered, heavy-duty flail mower that will cut a 44" swath through vegetation up to 4" in diameter. The 16-blades, each weighing 2-lbs., make this one of the most effective mowers on the market today.



VERSA Side-Mount Flail

As the VERSA Flail easily cuts through thick grass and weeds, it will also leave a smooth, finished cut. The mower has a float control that allows it to follow the contour of the ground, preventing scalping. The flail projects cut material downward not outward.

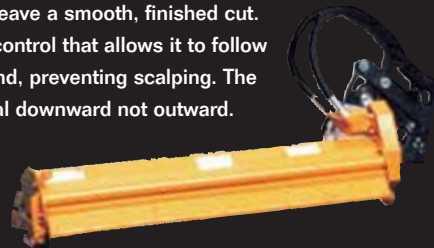

Cut in those hard-to-reach places with your choice of 17', 20' and 23' booms.

Heavy-Duty Grass Flail

You will appreciate the smooth cut of this heavy-duty grass flail. Boom-mounted, it is easy to reach over fences, around ponds and creek banks, allowing you to cut in areas inaccessible to your tractor. Available in 60" model, it is built for years of trouble-free service.



BOOM-AXE® Rotary Brush Cutter

The BOOM-AXE is a heavy-duty, boom-mounted, rotary brush cutter that is capable of cutting up to 5" diameter trees and brush. By being boom mounted, you can reach up into the trees to cut limbs, or over fences to cut brush. The hinged front shield may be opened for easy access to tree limbs. Available in 50" and 60" widths.

