

A SMOOTH CUT FOR THOSE ROUGH JOBS



Welcome to the revolutionary machine that does the work of a chainsaw without the work. BuzzBar® sets the standard for all the other machinery in its class with large 26" blades that allow you to cut through the clutter and get those difficult jobs done in no time. So get on the road with a BuzzBar; now nothing stands in your way.



BuzzBar® Tree Limb Cutter

BUILT SHARPER™

BuzzBar® Tree Limb Cutter

Power

The BuzzBar is hydraulically-powered by a 38-HP hydraulic motor with power transferring from the motor to the blades by high performance Micro-V belts attached to the rear of the cutter, reducing chances of entanglement.

Blades

The BuzzBar features 26" diameter rotary saw blades made of 3/16" steel, capable of slicing through up to 6" diameter material. Each blade has 60 teeth that are set and filed. An extra set of blades is included with each unit.

Spindles

Belt alignment problems are reduced due to precision machined spindle-housing surfaces. Grease pressure relief fittings are used to prevent blowout of shaft seals. Each shaft also has an anti-wrap guard to protect seals from debris. The 4130 1-3/8" alloy steel spindles have tapered roller bearings for smooth operation and are factory pre-loaded.

Durable

The cutting head main channel is one piece formed 3/16" thick steel coupled with 3/8" thick steel end plates for long life. The Alamo Industrial exclusively patented rear shield is made of 10-gauge steel and formed for stiffness making the cutter ideal for working in heavily vegetated areas.

Easy Maintenance

The unit is easily maintained through a hinged belt guard with quick release fasteners for quick, easy access to the belt tensioner. The tension of the belt is adjusted with a simple slide mechanism. Grease fittings for each saw blade spindle are located on the front of the cutter for easy maintenance.

Mounting


Mounts to all Alamo Industrial Boom Mowers including the A-Boom, Versa® Boom, Machete®, Rear Mount Boom and the Maverick™, which are available in ranges from 17' up to 30'. When used in conjunction with the Quick Hitch® quick attach system, the BuzzBar can be taken off and switched with another head in minutes! (Some models of the BuzzBar are not available for use with certain boom lengths – inquire with customer service for specific combinations.)



Quick Hitch® quick attach system.

This information is intended to be of a general nature only; specifications are subject to change without notice as we continue to improve our products.

© 2004 Alamo Group Inc. Alamo Industrial and BuzzBar are registered trademarks of Alamo Group Inc.

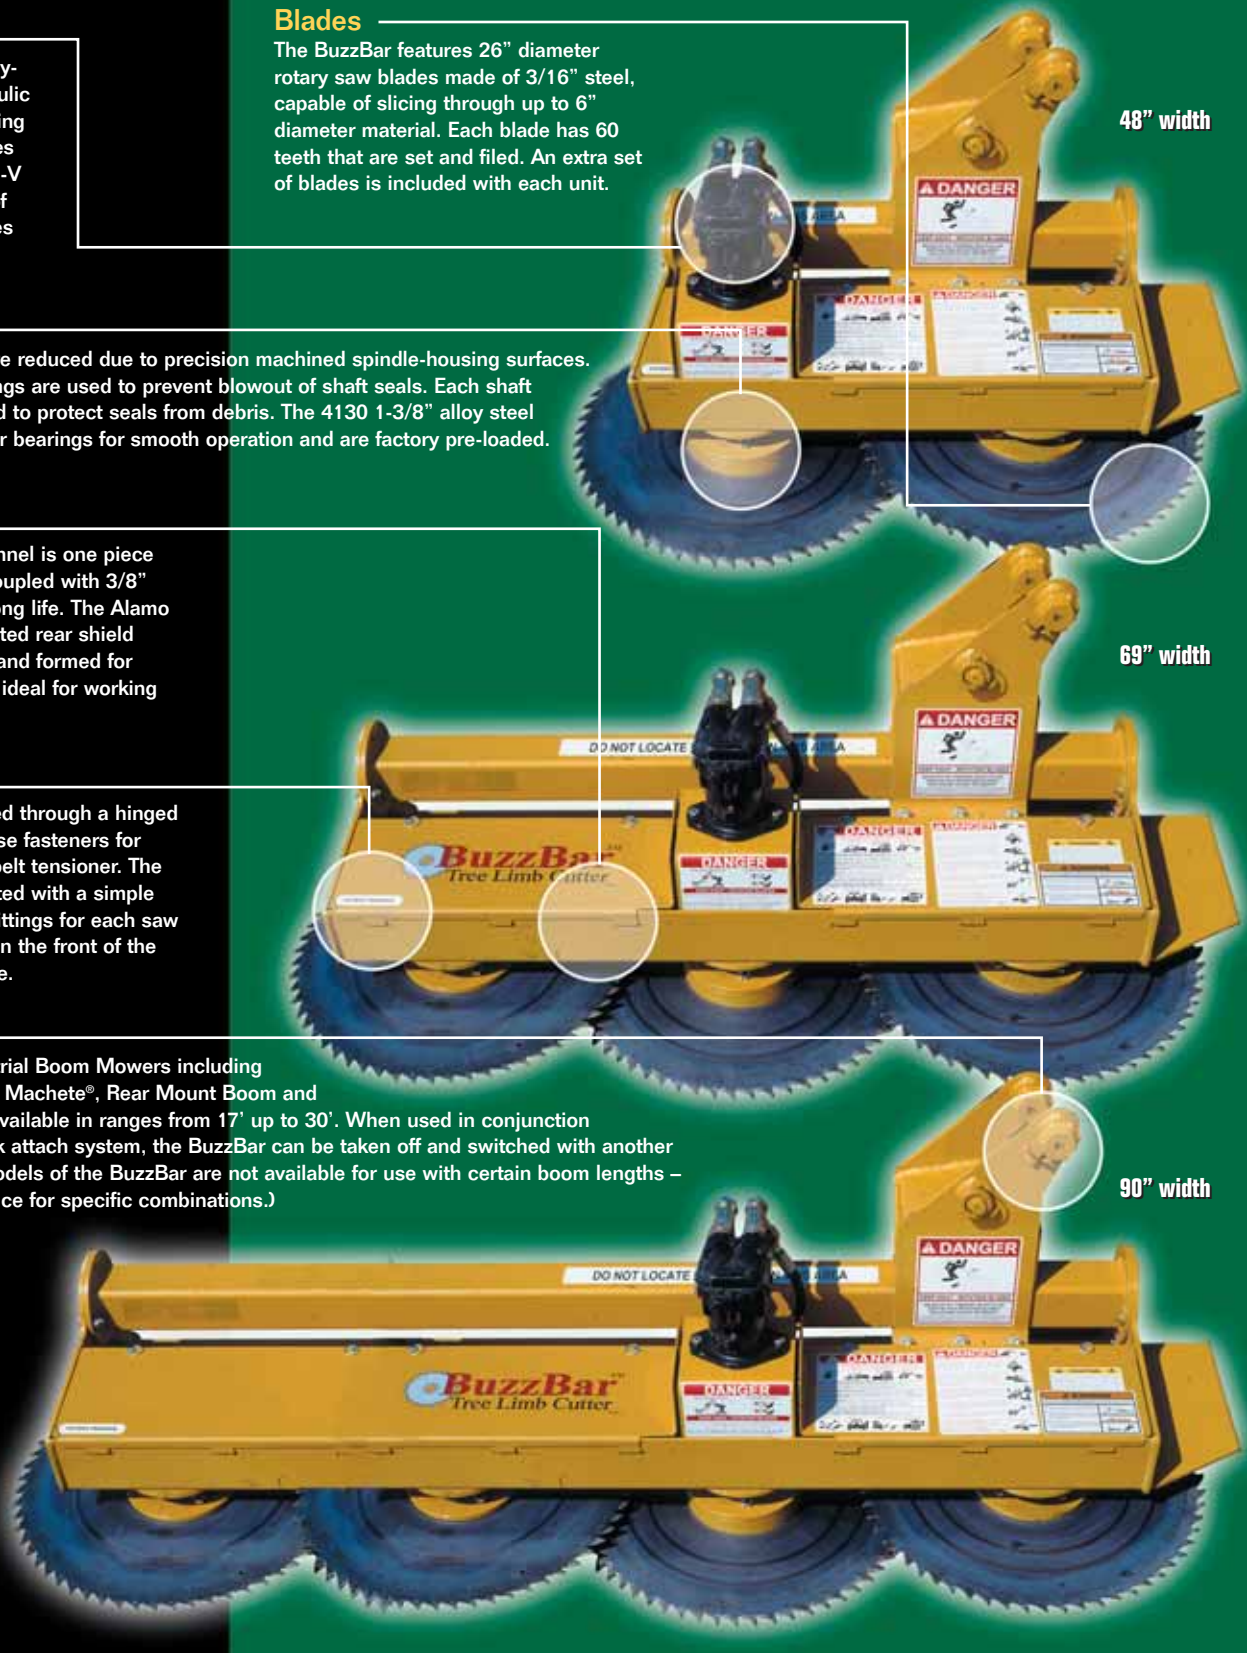

Additional Specifications

Cutting Widths	48"	69"	90"
Approximate Weight	650 lbs.	705 lbs.	800 lbs..

Blades: 26" diameter, 3/16" steel. Extra set with each unit.

Warranty: One year limited parts and labor. Non-governmental users are subject to modified policy. Only genuine Alamo Industrial parts should be used for warranty replacement.



1502 East Walnut St. • Seguin, Texas 78155

1-800-882-5762

www.alamo-industrial.com